


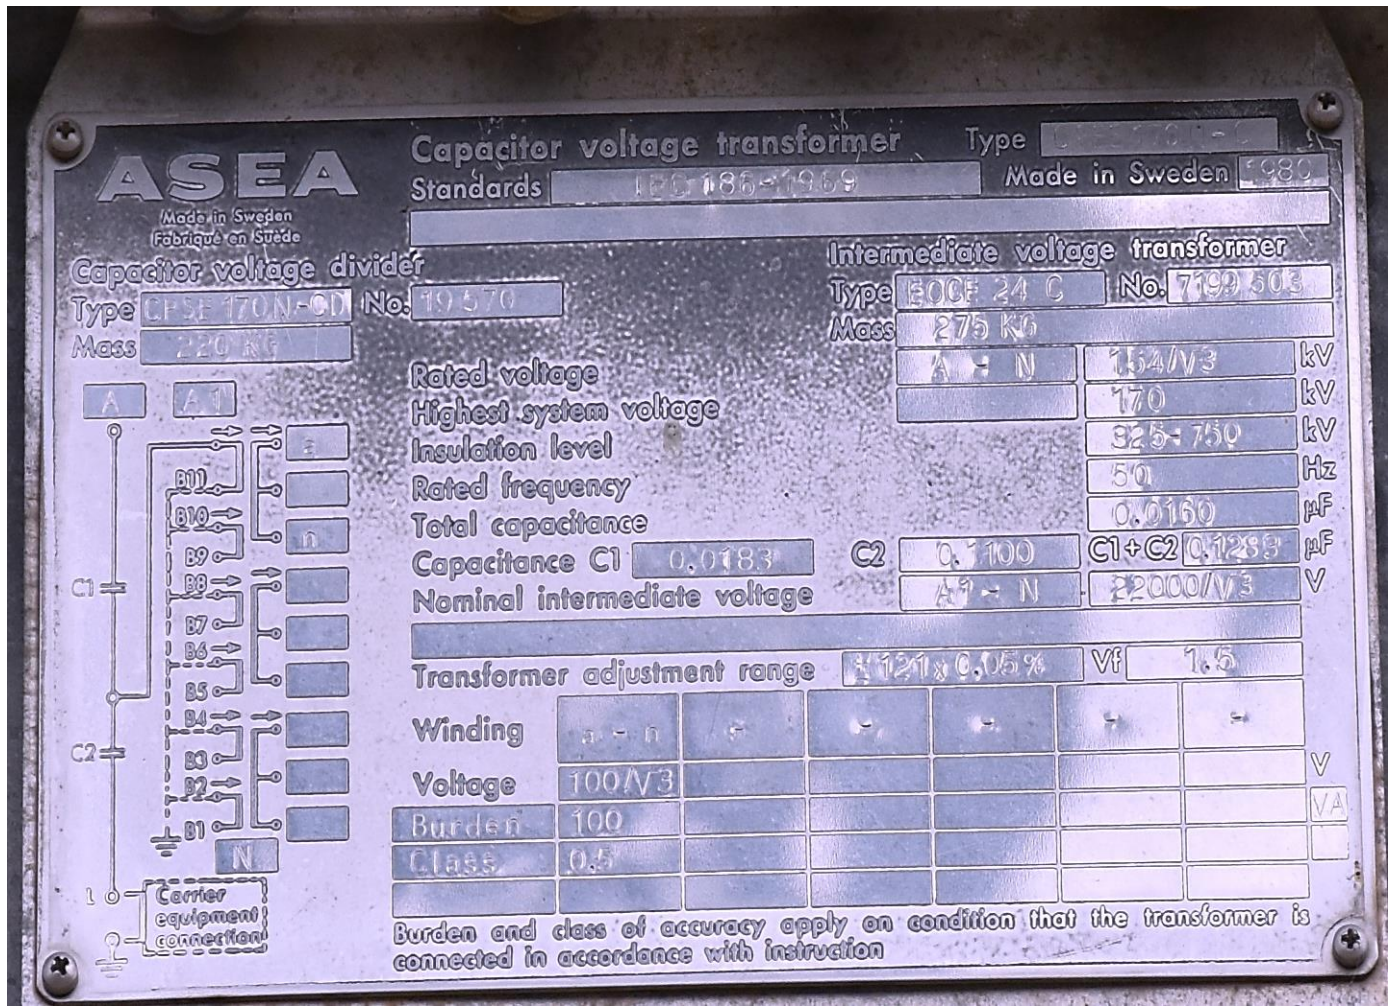

ASEA		CAPACITOR VOLTAGE TRANSFORMER TYPE CPDE 170 N-C		K4983 2404-4	
				This document is based on licence drawing No. Sheet	
Department KKR	Year 77	Week 21	Design checked by TS		Accepted for prod. by TS
Drawing checked by TS		Drawn by TS		European projection ☒ indicates R ₀ in μm	

MAX OPERATING VOLTAGE kV	CAPACI- TANCE +10%-5% pF	CREEPAGE DISTANCE min mm	APPROX. NET WEIGHT kg
180/√3	16000	2800	550

B *ANSLUTNINGSKLÄMMA RAK*
TOTALT GST FÖR WL1 O. WL2

AL-LINA 593 mm

See separate drawing

Ø 30 mm AL-PINNE

2610 ± 30

730

580

480

480

580


700

Earth clamp for conductor 45-18

S. DANDE MATTENISS	S. DANDE MATTENISS
DEFINITION MENTIONNER	DEFINITION MENTIONNER
9513.1005-150	9513.1005-150

2	Revised	77 44	KKR	<i>TS/TS</i>
a	Revised	77 34	KKR	<i>TS/TS</i>

our written permission, and the contents
must not be imparted to a third party
used for any unauthorized purpose.
Attention will be prosecuted. ASEA

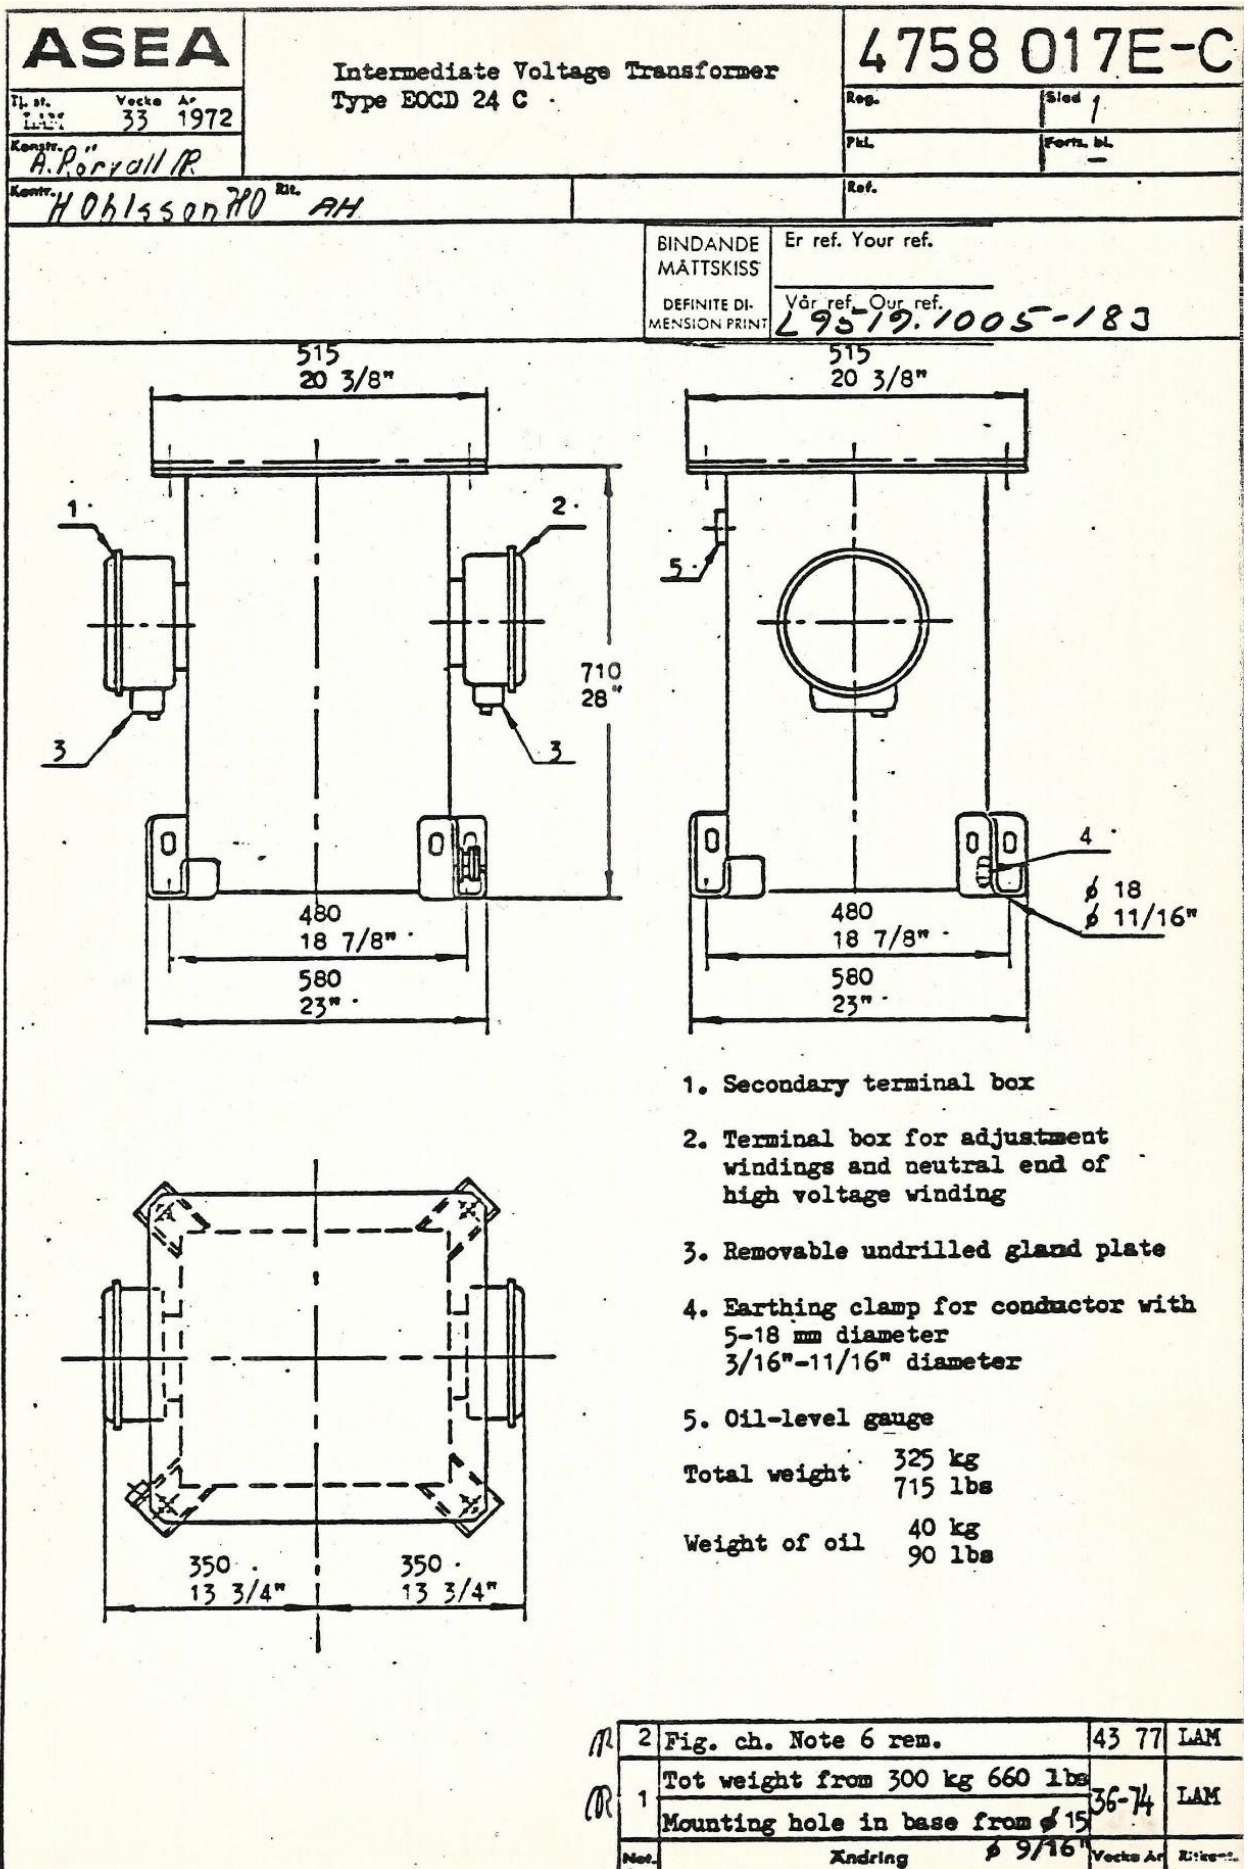

This document must not be copied without our written permission, and the contents thereof must not be imparted to a third party nor be used for any unauthorized purpose. ASEA. Confevention will be prosecuted.

Denne handling er af uanset værd modtagende kopieres. Den får ej heller delgives anden eller offentlig brug. Overtrædelse heraf straffes med fængsel eller bøde. ASEA.